



Owner's Manual

- *Initial Setup*
- *Fill and Charge*
- *Operating Instructions*
- *Parts Diagram(s)*
- *Contact Information*

ACC Eco Shampoo Sprayer

Model: Mobile - Type 201



T: 1.800.265.7405 Email: info@accint.com


ACC Eco Shampoo Sprayer

Initial Setup


1. Unpack ACC Eco Shampoo Sprayer Type 201 and visually inspect for any damage sustained during shipping. Please advise ACC International Inc. Parts Department prior to using.



2. To pressurize the tank, the unit comes with a standard male air fitting. If this does not fit your existing air compressor...

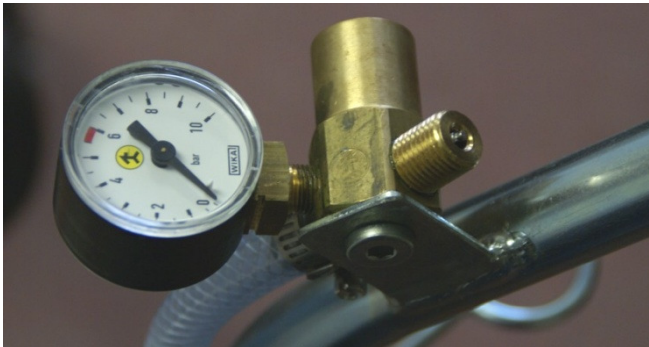

3.remove the male air fitting from pressure gauge manifold...

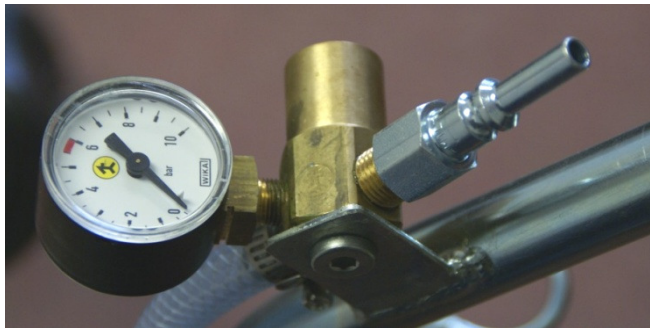

4. ...and install male fitting that fits your air hose configuration.

(sample shown in picture not included)

ACC Eco Shampoo Sprayer

Fill (Water & Shampoo) and Charge(Air)



1. Water and Shampoo are added to the sprayer via the pressure cap / lid. Open top of sprayer...



2. ...by grasping metal locking handle and lift up until the plastic red protectors on the locking handle are facing up.



3. Push top into tank and turn the pressure cap clockwise $\frac{1}{4}$ turn , tilt the pressure cap into the tank ...



4. ...and remove it from the tank.

5. Fill the tank with your shampoo mixture* until it is $\frac{2}{3}$ to $\frac{3}{4}$ full (allow air space for air compression).

**Note: If using ACC Eco Shampoo (super concentrate) add 3.5 ounces of shampoo into the tank and fill with water as directed above.*

Continued on next page

ACC Eco Shampoo Sprayer

Fill (Water & Shampoo) and Charge(Air)

6. Re-install the pressure cap (reverse of previous instructions).



7. Apply air pressure to the tank via the male air fitting.

8. Pressurize the sprayer till the needle on the pressure gauge gets to the red mark. (± 90 psi/ 6 bar).

9. Remove the air hose from the air fitting.

10. Remove wand from the holder and apply the shampoo mixture to the vehicle (see General Operating Instructions).

Note: If the tank still has some shampoo mixture in it, but isn't working because the pressure is depleted, simply re-pressurize the tank and continue applying shampoo.



11. When the mixture has been used up, depressurize the tank by grasping the metal ring on the pressure cap, lift up and turn clockwise or counterclockwise $\frac{1}{4}$ turn.



12. When the air stops leaking out, reset the ring on the pressure cap and remove the pressure cap to refill the tank.

ACC Eco Shampoo Sprayer

General Operating Instructions

1. Apply shampoo by taking the wand and pointing it at the vehicle, keeping the end of the wand approximately three (3) feet from the surface of the vehicle.
2. Start the shampoo application by pulling the trigger on the wand and sweeping the wand left and right in a smooth motion, working your way up from the bottom of the vehicle to the top (to the bottom of the windows on buses).
3. Proceed all the way around the vehicle, from the front side, all the way around the back to the front of the other side, walking at a brisk pace, applying shampoo as you move.

General Notes:

- Apply the shampoo sparingly, as too much shampoo will take longer to rinse off and may leave spots. See “hints” below for areas that may require extra shampoo.

Bus Cleaning Hints:


- The windows do not require shampoo application. The ACC Eco-Power Brush will wash the windows perfectly and avoid spotting.
- Apply extra shampoo around the fuel cap, tires, tail pipe and under the rear bumper, as these areas tend to collect exhaust, oil, grease and excess road grime.

Trailer Cleaning Hints:

- Apply extra shampoo on rub rails, especially the top rail at front of trailer, as well as all door hardware as these areas tend to collect exhaust, oil, grease and excess road grime.

ACC Mobile Shampoo Sprayer - Type 201

Parts Diagram

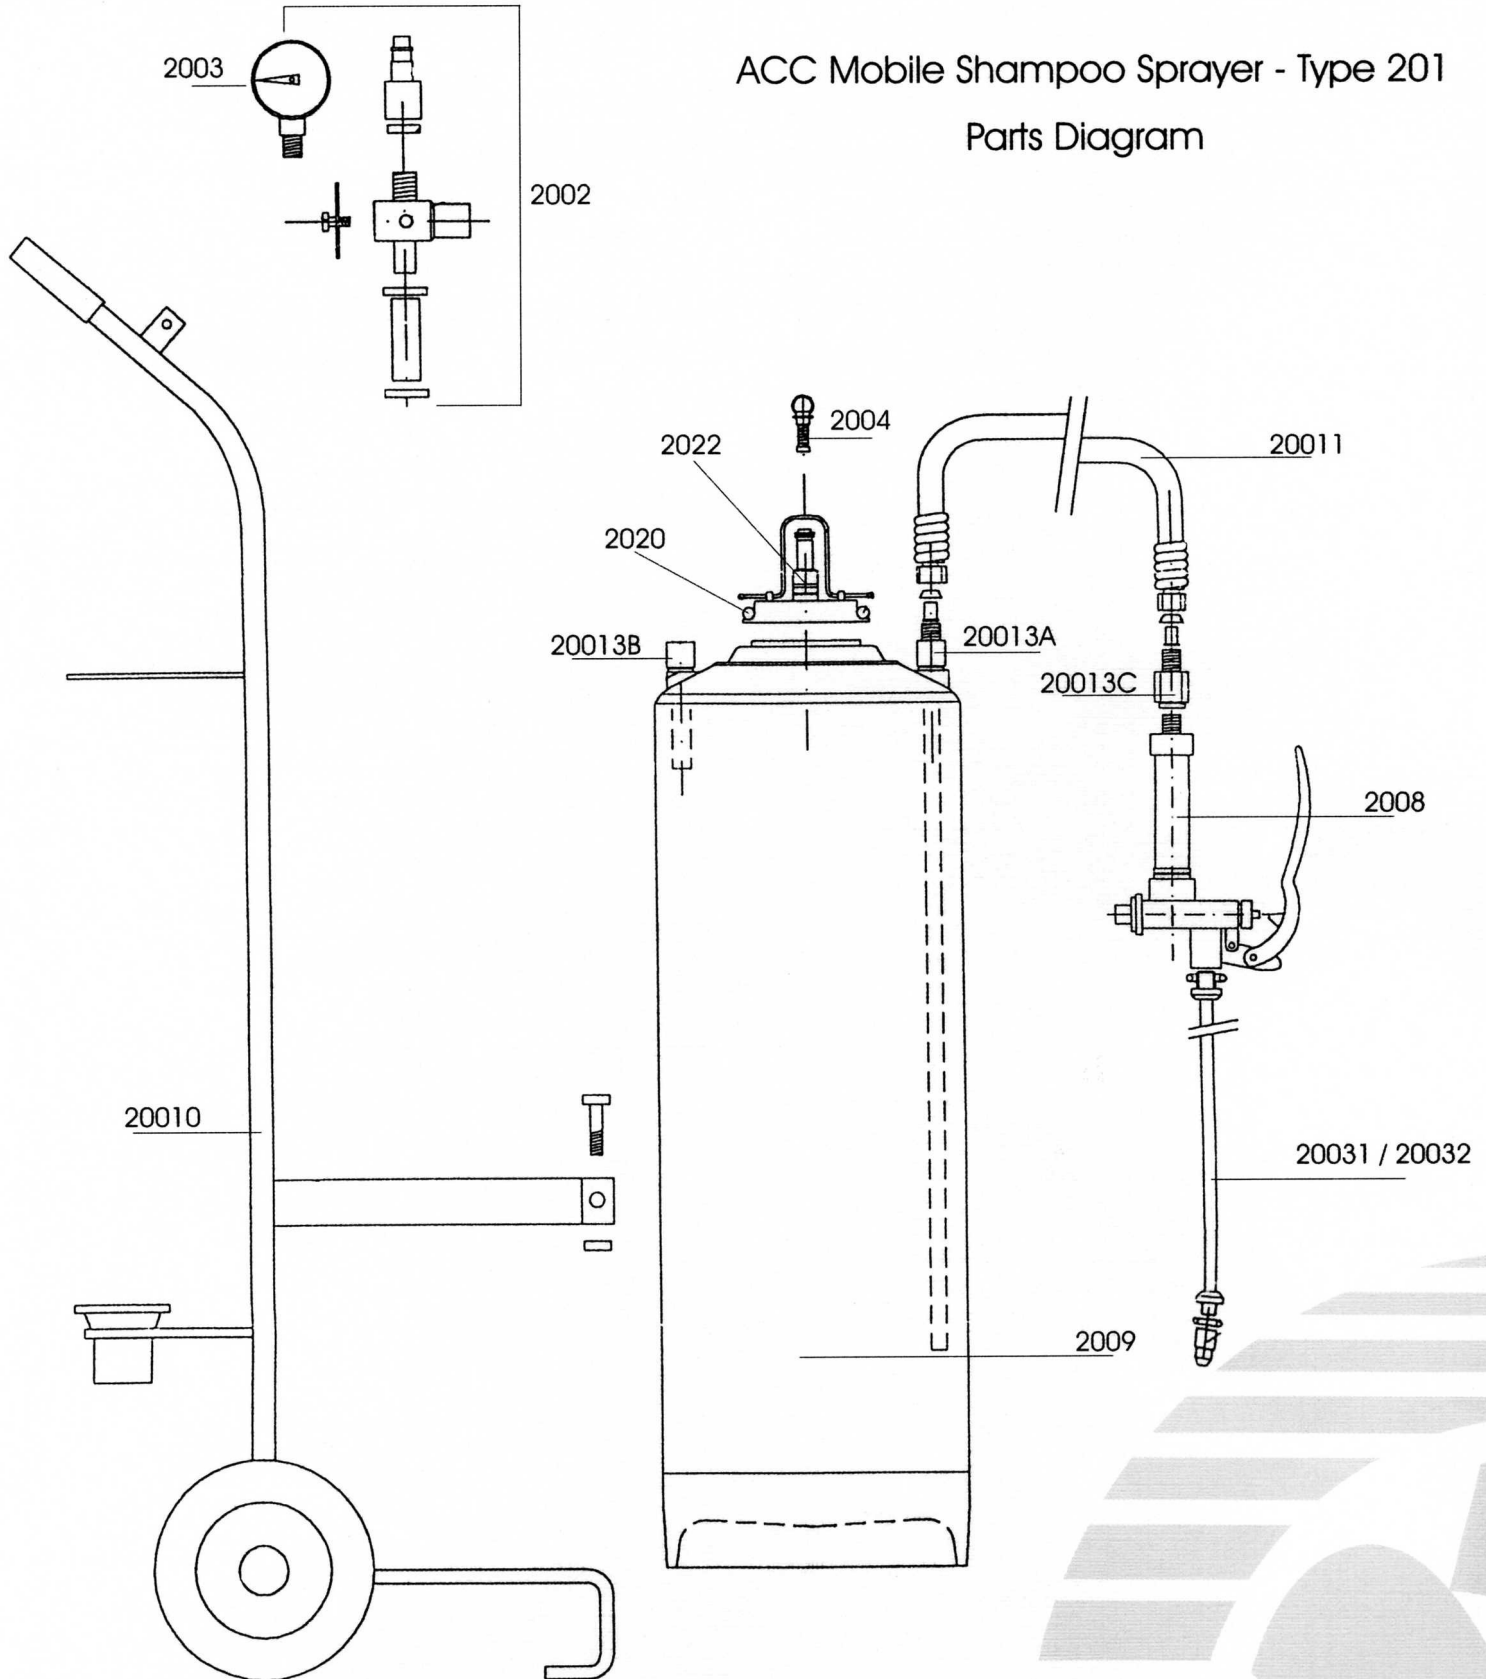

Contact Information:

ACC International Inc.

4640 Falletta Court,

Beamsville, ON

CANADA L0R 1B4

Toll Free: 1.800.265.7405

Telephone: 905.563.1444

Fax: 905.563.4452

Email : info@accint.ca

Web: www.accint.ca

